



Easy UPS 3-Phase Modular

Modular resilience, simplified

50-250 kW (400 V)



se.com/ups

Life Is On

Schneider
Electric

Scalability made easy

The Easy UPS 3-Phase Modular Uninterruptible Power Supply (UPS) delivers robust power protection and high availability in a cost-optimized, 50-250 kW 400V package ideal for small and medium data centers and other business-critical applications.

Easy UPS 3-Phase Modular is easy to select, quote, stock, install, scale, and maintain. It features a modular design with Live Swap in a compact, one-cabinet footprint. Its scalability enables you to pay-as-you grow, optimizing capital investment with competitive acquisition costs. Buy the power modules you need up-front, and enjoy optimized operating efficiency, then add power modules with TÜV verified Live Swap as demand grows. The modular design also enables Intelligent Redundant Controller, which increases the system's availability with no extra footprint. Compatibility with common battery features, delivering compact, long-life energy storage.

Smart Power Test (SPoT) Mode lowers the cost of site acceptance test by eliminating the need for an expensive load bank. Easy UPS 3-Phase Modular is EcoStruxure™-connected to give you peace of mind anytime, anywhere, and start-up service is included to optimize your system's performance, quality, and safety, making the offer more cost effective.

With Live Swap, modular design, and robust reliability, Easy UPS 3-Phase Modular is the easy choice for your business continuity.



Features and benefits



Easy

Simplify every step of the deployment process with the UPS that is easy to select, quote, stock, install, scale, and maintain.



Increase availability with no extra footprint

One extra power module for N+1 internal redundancy delivers ultra-high availability with no footprint penalty.



Optimized investment

Tailor the easy-to-scale UPS to your site's needs to reduce your capital expenditure and optimize UPS performance.



Compact footprint, scalability, and intelligent redundancy

Scalable power instantly with no downtime in 50 kW increments from 50-250 kW as your power requirements evolve in one cabinet without footprint penalty.



Innovative Live Swap

Keep your load protected, your business running, and your employees safer.



EcoStruxure IT

Monitor, manage, and model your IT infrastructure, and get service support, anytime, anywhere.*

* Contact your local representative for availability.

Well-suited for a wide range of data center and industrial applications



Data centers

- Small and medium data centers
- Edge computing



Telecommunications

- Public switches
- Transmission equipment
- On-premise equipment



Commercial buildings

- Retail/office space
- Manufacturing facilities



Retail

- Technical rooms in shopping malls or branch offices



Transportation

- Airports
- Tunnels
- Railway equipment



Healthcare

- Radiology and imaging equipment
- Operating rooms and Intensive Care Units
- Emergency power systems



Process automation

- Factory control systems



Environmental
Data Program

Next-level transparency for better-informed product choices. Learn more about the Environmental Data Program at: <https://www.se.com/ww/en/about-us/sustainability/environmental-data-program/>

Robust design

Robust design supports both IT and non-IT environments

- Fault-tolerant design ensures continuous protection in critical circumstances
- Maximum short circuit rating: 35kAIC
- Designed to perform in harsh environments with its high-quality air filter
- Suited for humid environments thanks to **conformal coating**
- **Backfeed protection** integrated directly within each power module to prevent reverse energy flow and safeguard connected equipment
- Top cable entry (bottom cable entry with optional bottom entry cabinet)
- No side clearance required for service
- Intelligent redundant controller and modular design enables +1 redundancy.



Higher availability with modularity

- One extra power module for **N+1 internal redundancy** keeps your load protected and with no extra footprint
- Optimized uptime with wide input voltage tolerance window (-20% to +15%)
- With **Live Swap**, it is simple and fast to add, replace, or remove power modules, display interface, and static switch
- Install up to 4 UPSs in parallel for capacity or redundancy, enabling scalable capacity expansion or redundant power protection
- **AI Load compatibility** automatically triggers battery energy draw when input current exceeds 118% of maximum capacity, optimizing load management through intelligent power distribution.



Scalability and performance with optimized capex

- **Unity Power Factor (PF=1)** allows for right-sizing protection to real IT needs
- Seamlessly integrates into electrical environment:
 - Single and dual mains supported
 - Copper cables suitable for TN installation
- Increase onsite reliability and reduce start-up costs by using the Smart Power Test feature (SPoT)
 - Easily test the UPS at full power
 - Reduce risk to load and improve product quality



Future-proof your data center

Live Swappable power module enables power expansion without downtime and extra footprint

Easy UPS 3-Phase Modular and scalable design supports the Live Swap of power modules, optimizes your up-front capital investment, provides you with power continuity, and gives you more flexibility to expand power and pay as you grow.

Optimize your investment over time

With modular, scalable design, it is easy to right-size your power protection and redundancy from day one. This maximizes your operating efficiency and sustainably minimizes your energy consumption.

Scale fast with no unexpected downtime

Modular design and Live Swap make just-in-time data center expansion effortless, with no downtime, enhancing business continuity.

Keep your employees safer

With Live Swap, it is simple and fast to add, replace, or remove power modules while the UPS is online and fully operational, increasing protection for your employees by reducing the risk of potential arc flash.

Scale and pay as you grow

Scale power instantly with no downtime in 50 kW increments from 50-250 kW as your power requirements evolve.



Live Swap: the new frontier for modularity, redundancy, and employee protection

Easy UPS 3-Phase Modular with Live Swap is a pioneering innovation, driven by Schneider Electric's strong safety culture, delivering a touch-safe design through the entire process of adding or replacing the modular components of the Easy UPS 3-Phase Modular while it remains online.

This innovative capability enables fast and simple insertion and replacement of the power and bypass modules in the UPS, while the UPS is online and fully operational, without having to transfer the UPS to maintenance bypass or to battery operation and with increased protection for your employees.

Easy UPS 3-Phase Modular has been designed to reduce the risk of shock and potential arc flash during the insertion or removal of power and bypass modules, as well as to ensure touch safety throughout the entire Live Swap operation. The UPS modules can be added or replaced while the UPS is online, and the energy incident levels are kept below 1.2 cal/cm².

The numerous and rigorous tests completed have been witnessed and verified by TÜV Rheinland, a recognized third-party laboratory.



Easy UPS 3-Phase Modular with Live Swap is Schneider Electric's response to national and local electrical safe work practices regulations. For more information, you can read [WP-13, Mitigating Electrical Risk While Swapping Energized Equipment](#).

Compact, long-life energy storage

Long-life Galaxy lithium-ion batteries

As a first mover with a vast installed base, Schneider Electric has developed its own Galaxy lithium-ion battery solution that also delivers these benefits:

- **Double** your battery life compared with any VRLA battery, optimizing TCO
- Recharge **2–3x faster** than VRLA solutions
- High temperature tolerance
- Simplify and speed up installation with our internal power supply
- Enhance battery safety with three levels of battery management system (BMS)



Easy to install and service

Easy installation and start-up

- Lightweight, small footprint
- Everything you need is included – Network Management Card (NMC), Modbus, single and dual mains, air filters, and dry contacts
- Top cable entry by default. For bottom cable entry, a Bottom Entry Cabinet (BEC) can be used


Easy to maintain and fast to service thanks to its modular architecture and Live Swap design

- Fast mean time to repair thanks to Live Swap modules
- Reduces risk of human error and load drop, and enhances employee protection
 - Scale or service your UPS without disruption – Live Swap enables safe, on-the-go addition or replacement of modules while the system stays fully operational, increasing protection for your employees.
 - The UPS self-detects the new power module and automatically updates its configuration settings for more uptime and convenience

Speed up deployment time and reduce start-up costs by using the Smart Power Test (SPoT) mode before connecting your critical building or facility load

Smart Power Test (SPoT) mode enables the service engineer to test the UPS with full capacity current flow through important components and converters without using a large system input current, and without needing a load bank connected to the system or other system modifications.

- Easy method to test the UPS at full power
- Can be conducted after service, repair, upgrade, or commissioning of UPS installation to verify system is properly installed
- Reduce risk to load and improve product quality
- Significant cost, time, and power savings

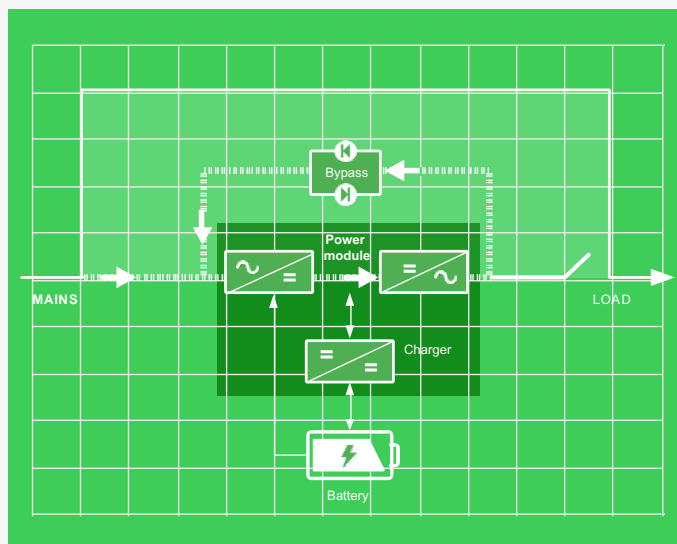

Visibility and peace of mind

EcoStruxure IT enables resilient, secure, and sustainable data centers and IT environments

Schneider Electric's comprehensive Data Center Infrastructure Management (DCIM) solution, EcoStruxure IT, ensures business continuity by enabling secure monitoring, management, insights, planning, and modeling – whether from a single IT rack to hyper-scale IT – on-premises, in the cloud, and at the edge.



Resilient



Secure



Sustainable

Easy visibility

Monitoring and management software streamlines data center device management:



EcoStruxure IT Expert provides you a hands-on approach with **cloud-based** monitoring software that synthesizes and analyzes performance and alert data into proactive recommendations and enables wherever-you-go visibility from any device. Try it now: www.ecostruxureit.com/ecostruxure-it-expert/#trial



EcoStruxure Data Center Expert is a scalable end-to-end **on-premise** monitoring software that collects, organizes, and distributes critical device information, providing a comprehensive view of your company-wide, multi-vendor physical infrastructure.

24/7 peace of mind

Digital services proactively monitor your critical devices:



EcoStruxure Asset Advisor* for secure power and cooling provides you a hands-off approach with 24/7 remote monitoring service by the Schneider Electric Connected Services Hub experts.

We monitor and troubleshoot, you relax.

Operations, optimized

Planning and modeling software transforms data into performance insights:



EcoStruxure IT Advisor is a data center infrastructure planning and modeling solution that provides Data Center Managers in large enterprises and colocation data centers with full insights into their infrastructure to improve profitability, sustainability, and resiliency.

Comprehensive on-site services

Start-up service: included with UPS

- Commission the installation in accordance with manufacturer's recommendations. Ensure optimal system performance from Day 1

Schneider Electric-certified installation services

- Expert configuration of your equipment for optimal performance and reliability

Maintenance services

- Ensure proper care of your mission-critical applications
- Preventive maintenance and response time upgrades, where available

Flexible service plans/ on-site extended warranty

- Hassle-free system maintenance
- Improve uptime at a predictable cost

**Contact your local representative for availability.*

Easy UPS 3-Phase Modular	Features
Technical ratings	20, 40, 60, 80, 50, 100, 150, 200, 250 kW
Nominal power (kW)	50, 100, 150, 200, 250
N+1 power ratings	Up to 250 kW N+1 with no footprint penalty
Topology	Online double conversion
Key features	
Modular elements	Power modules (50 kW/3U), static switch module (250 kW/3U)
Third-party verified Live Swap	Power module, static switch module, control module, display interface
Display	7-inch multi-color touchscreen display
Cabinet type	Standalone, rack style (42U, 19-inch width, APC Raven Black / White RAL9003)
Dry contacts	4 configurable input contactors; 5 configurable output contactors
Internal intelligent redundancy	PM: N + x 1. N: 1 - 5 2. x: 0 - 1 3. N + x <= 6 Intelligent redundant controller module (one provision as optional)
Lithium battery compatibility	Both for Galaxy lithium-ion batteries and third-party brand lithium-ion batteries
Breakers or switches	Full configuration: UIB, UOB, MBB, SSIB Standard configuration: IMB
Adaptive power module derating	Its power modules scale seamlessly from 50 kW down to 20 kW, enabling your UPS to operate at 20 kW / 40 kW / 60 kW / 80 kW / 100 kW
Common battery	Cuts battery capital costs without compromising performance.
Configurable neutral-loss behavior	Customer can customize neutral-loss behavior to match your unique electrical environment, ensuring stable performance even in harmonic-rich or unbalanced grids
Efficiency	
Double conversion mode	Up to 96%
ECO mode	Up to 99% @ 250 kW
Redundant controller	Allows for online replacement (Live Swappable) of the controller
Parallel capability	Supports up to 4 UPSs in parallel configuration
Backfeed protection	Integrated directly within each power module
AI Load compatibility	Automatically triggers battery energy draw when input current exceeds 118% of maximum capacity
Input	
Input voltage (V)	380 / 400 / 415 V
Input voltage range	380 / 400 / 415 V (-20% to +15%)
Mains input	Single/Dual mains. Single mains by default
Input frequency	40-70 Hz
Input current total harmonic distortion (THDI)	≤ 3% (full linear load)
Input power factor @ 250 kW	> 0.99 @ load > 25%; > 0.95 @ load > 15%
Cable entry	Top (optional bottom cable entry cabinet available)
Maximum input short-circuit level	35 kA (Icc)
Output	
Nominal output voltage (V)	380 / 400 / 415 V
Load power factor	PF = 1 @ 40 °C
Load power factor compatibility	0.7 leading to 0.7 lagging without derating
Voltage regulation	+/- 1% (symmetrical load); +/- 3% (asymmetrical load)
Frequency	50 / 60 Hz (+/-0.1% @ free running)
Overload capacity: normal or bypass operation	1 minute @ 150%; 10 minute @ 125% at 400 V/40 °C 60 minutes @ 110% load
Overload capacity: battery operation	1 minute @ 125%
Output THDU (linear load)	1% @ full load
Output THDU (non-linear load)	3% @ full load

Easy UPS 3-Phase Modular	Features
Batteries	
Type	VRLA or Lithium-ion
DC bus / number of battery blocks	40-48 with full load
Backup time	Up to 2-4 hours
Charging power	5-60% of full power of power module (user-selectable) @ 400 V
Number of supported battery breakers	10
Temperature monitoring	Yes (4 sensors, including one internal temperature sensor)
Battery runtime estimation	Yes
Temperature compensation charging	Yes
Battery deep discharge protection	Yes
Environment	
Storage temperature	-25°C to 55 °C - without batteries
	70 °C for storage with 16 hours - without batteries
	-15 °C to 40 °C - with batteries
Operating temperature	0 °C to 40 °C
Humidity	0% to 95% non-condensing
Operating elevation	1000 m @ 100% load; up to 3000 m with derating as per IEC 62040-3
Audible noise at 1m from unit	68 dB <= 70% load; 74 dB at full load
Ingress protection (IP) class	IP20 (IP32 and IP42 optional)
Dust	Supports harsh environments. Pollution degree 2 (IEC 62040). Air filter included.
Conformal coating	On PCBA
Mechanical	
Size (HxWxD)	1991 x 600 x 850 mm
Weight (unpackaged)	216-356 kg (one internal switch); 251-391 kg (four internal switches)
Communication	
Communication interface	Network management card (included). Ethernet, SNMP, Modbus RS485 or TCP/IP, BACnet. Compatible with EcoStruxure Data Center Expert.
Multilingual graphics display	19 languages English, French, German, Italian, Polish, Portuguese Brazilian, Simplified Chinese, Turkish, Universal Spanish, Czech, Danish, Dutch, Greek, Indonesian, Korean, Norwegian, Romanian, Swedish, Thai
Standards and approvals	
Safety	IEC 62040-1
Performance	IEC 62040-3
EMC	IEC 62040-2 cat C3
Surge	IEC61000-4-5
Approvals	CE, CB Report
Environmental	RoHS, REACH, WEEE, Product Environmental Profile (PEP)
Transportation	IEC TR 60721-4-2, Level 2M2
Live Swap	Qualified by TÜV Rheinland
Warranty	1 year
Serviceability	Front service for all modules

Options and accessories

Bottom entry cabinet	Galaxy lithium-ion battery cabinets	Seismic kit
Empty battery cabinet	Maintenance bypass panel	Backfeed kit
Battery breaker box	Depth adapter (1100/1200mm)	Parallel communications kit
Battery breaker kit	Battery temperature sensor	Intelligent redundant controller
Classic battery cabinet	Network management card	IP 32 kit and IP 42 kit

se.com/ups

Life Is On

Schneider
Electric

About Schneider Electric

Schneider's purpose is to empower all to make the most of our energy and resources, bridging progress and sustainability for all. We call this Life Is On. Our mission is to be your digital partner for Sustainability and Efficiency. We drive digital transformation by integrating world-leading process and energy technologies, end-point to cloud connecting products, controls, software and services, across the entire lifecycle, enabling integrated company management, for homes, buildings, data centers, infrastructure, and industries. We are the most local of global companies. We are advocates of open standards and partnership ecosystems that are passionate about our shared Meaningful Purpose, Inclusive and Empowered values.

www.se.com

Schneider Electric SE

35 Rue Joseph Monier
92500 Rueil Malmaison – France

©2025 Schneider Electric. All Rights Reserved.

Schneider Electric | Life Is On is a trademark and the property of Schneider Electric SE, its subsidiaries, and affiliated companies. • 998-24349000